

ADELE

Deck Valves & Aqua Filler




Pack consists of:

- | | |
|--------------------|--|
| <i>1 x 34890SF</i> | <i>Pair Deck Bath Valves</i> |
| <i>1 x 033</i> | <i>Low Pressure Aqua Filler
with clic-clac waste</i> |

Adele

Par manípulos 3/4"

Pair 3/4" deck valves

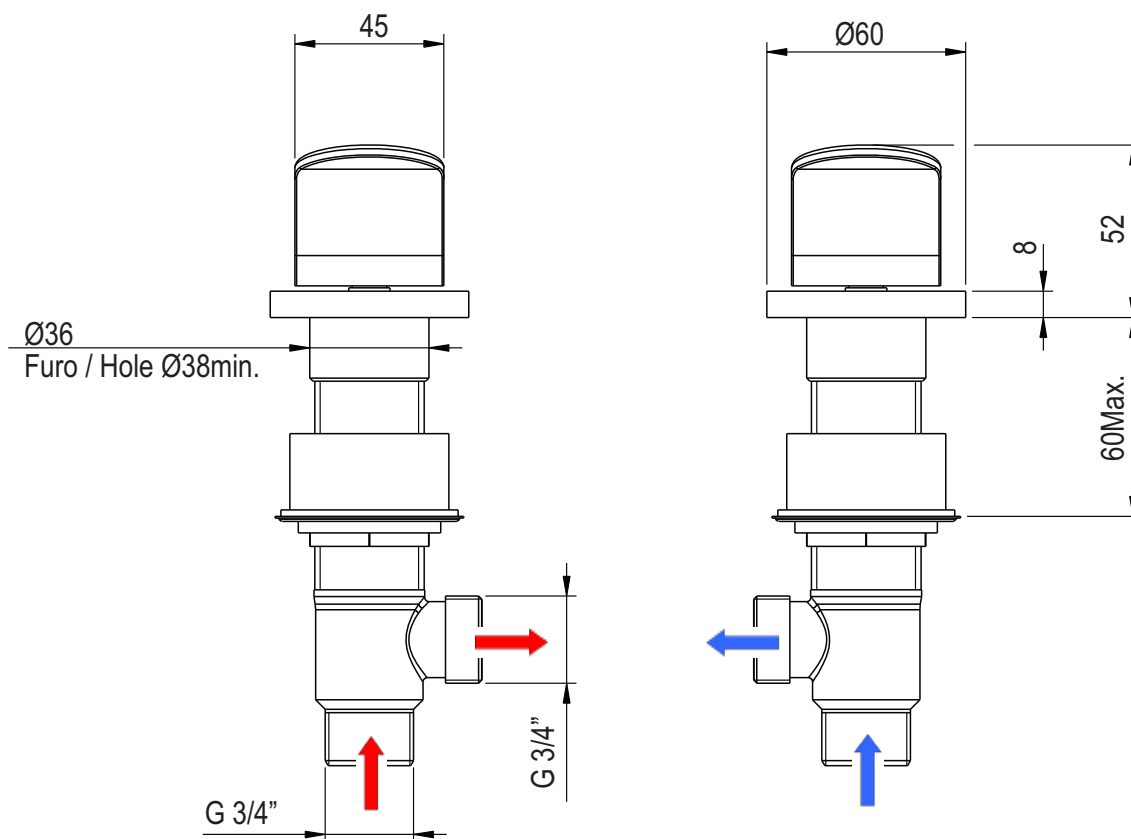

CIFIAL

www.cifial.pt | cifial@cifial.pt

cifial@cifial.es

www.cifial.co.uk | sales@cifial.co.uk

www.cifialusa.com

www.cifial.pl | cifial@cifial.pl

dimensões / dimensions mm

nota/note: xxx representa diferentes acabamentos
xxx represent different finishes

perno (x2)
set screw
5020030

corpo manipulo (x2)
handle body
5712084

parafuso (x2)
screw
5020140

casquilho redutor (x2)
spline adapter
3400126

roseta (x2)
eschutcheon
3442040-xxx

válvula esquerda
left hand valve
3520099-xxx

válvula direita
right hand valve
3530099-xxx



www.cifial.pt | cifial@cifial.pt
cifial@cifial.es
www.cifial.co.uk | sales@cifial.co.uk
www.cifialusa.com
www.cifial.pl | cifial@cifial.pl


Instalador: Por favor entregue todas as instruções que acompanham este produto ao seu proprietário.

Installer: Please leave all leaflets with the building owner to file for future reference

5665198
983SF002D01

with clic-clac waste




- | | |
|----|---|
| 14 | Rubber Seal |
| 15 | 1.25" BSP compression nut |
| 16 | Flexible overflow pipe |
| 17 | Flexible inlet hose |
| 18 | Overflow body |
| 19 | Rubber Overflow Seal |
| 20 | Overflow clamp plate / Nozzle body |
| 21 | Overflow clamp plate screws |
| 22 | Key Bolts (x2) |
| 23 | Overflow cover |
| 24 | Allen Hex Key for tightening |
| 25 | Plastic Key for tightening |
| 26 | Long ferrule (for use with thicker baths) |

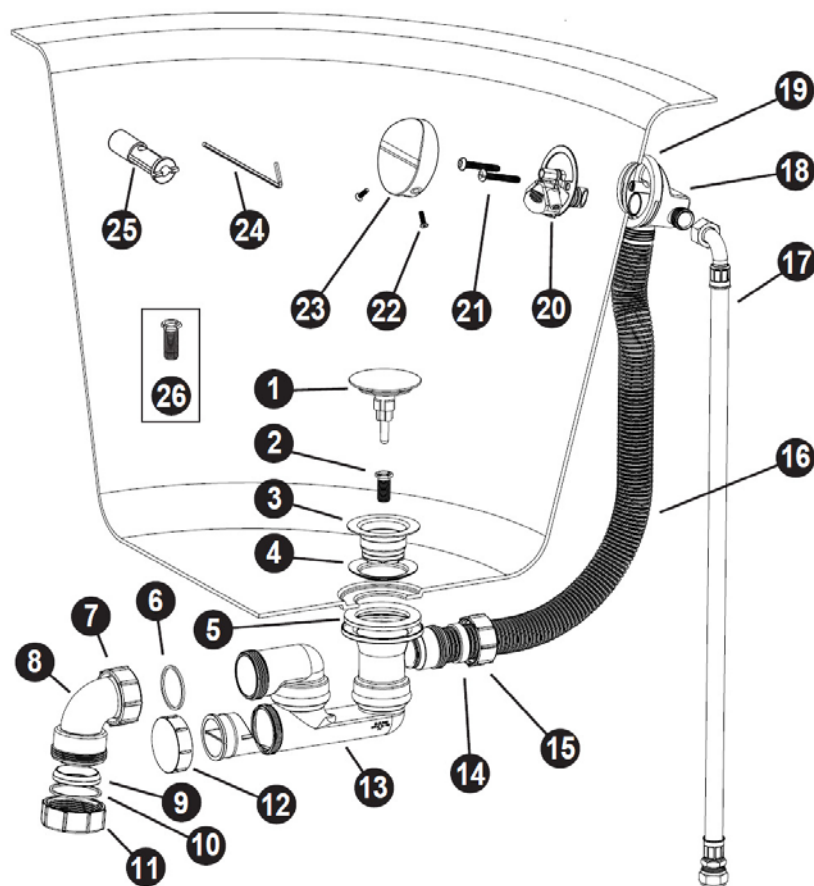


www.cifial.co.uk
cifialuk@btconnect.com

dimensions mm


with clic-clac waste

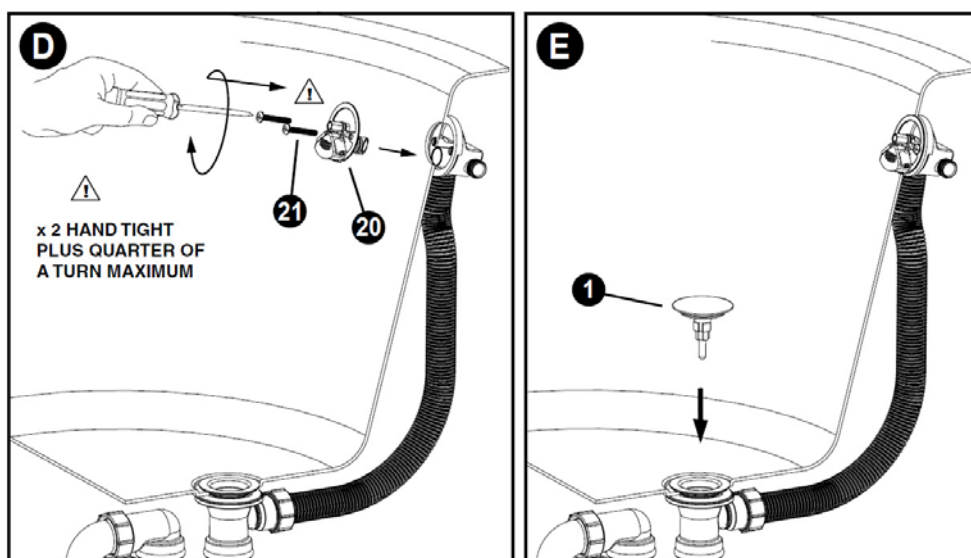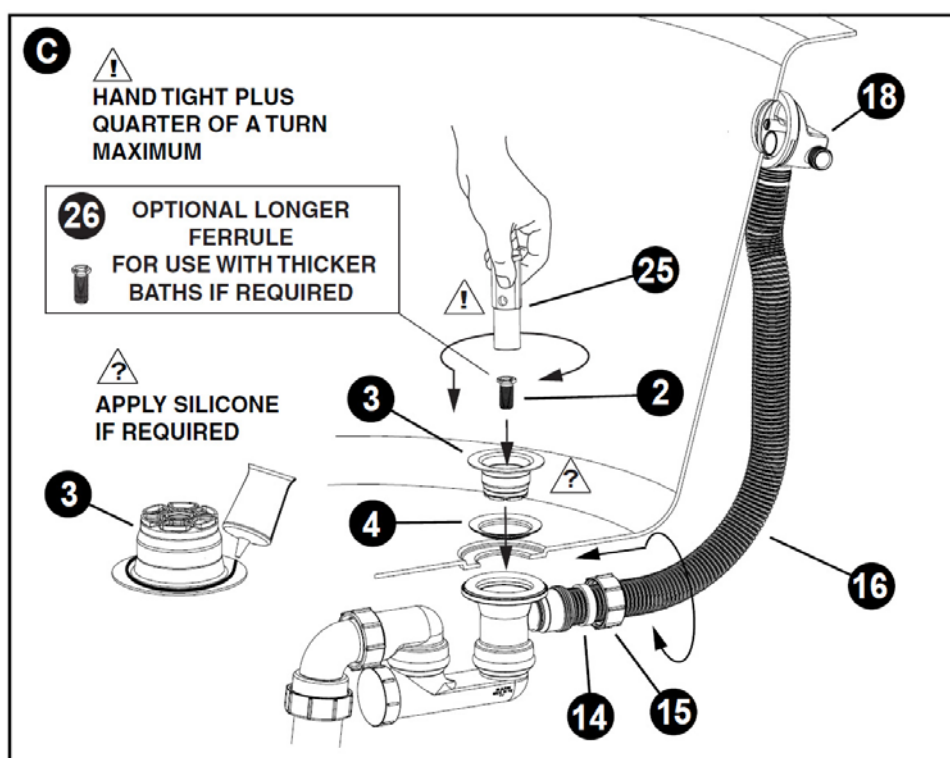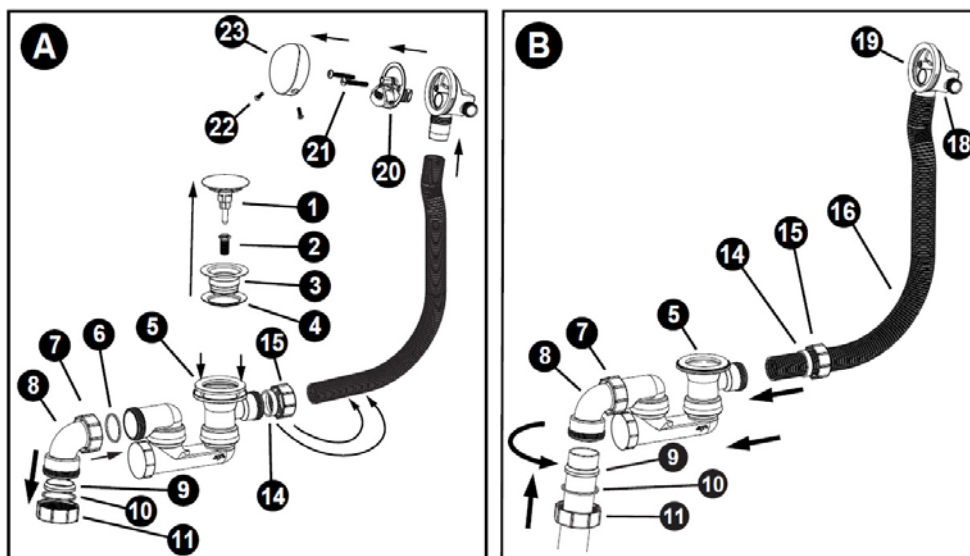

with clic-clac waste

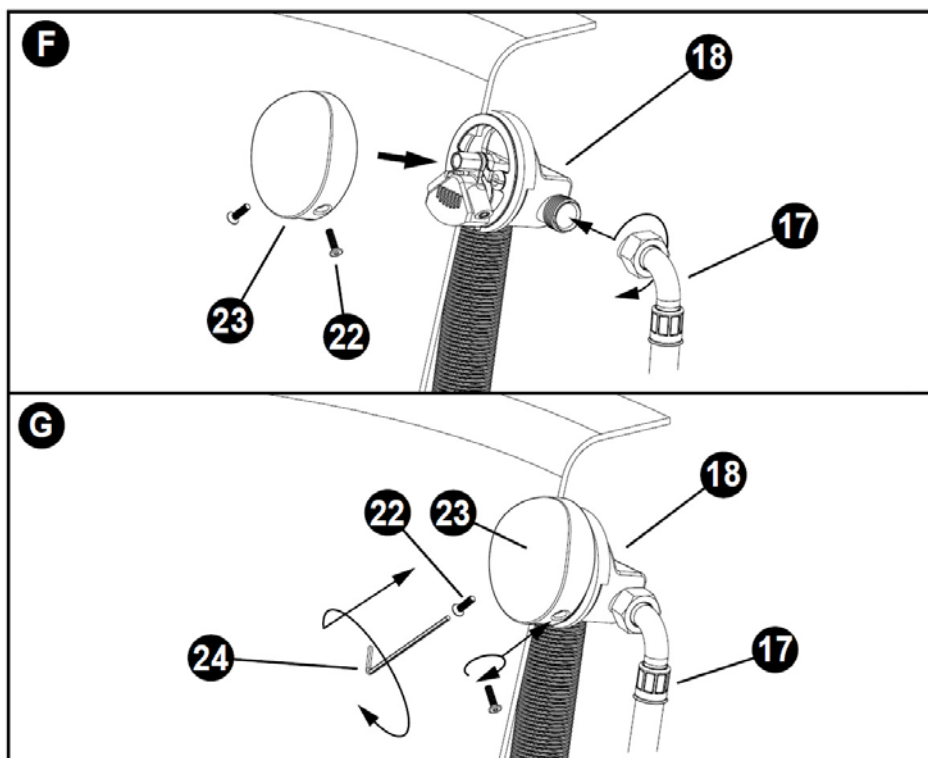

FILL BATH & CHECK FULL ASSEMBLY FOR LEAKS

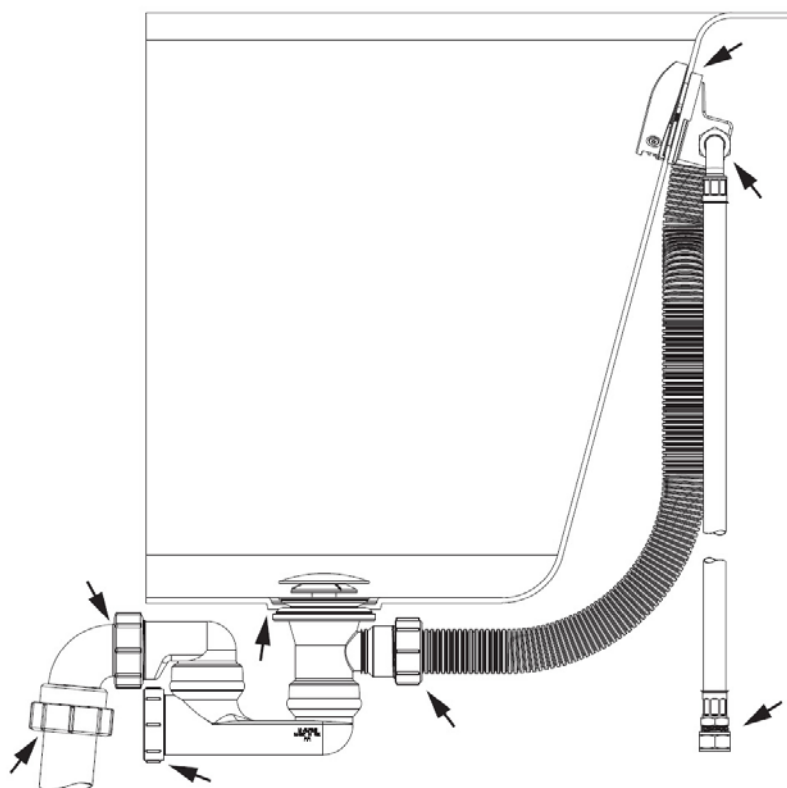

- Mixer valve (not supplied) must be installed according to manufacturers guidelines and Local authority regulations.
- Protection against pollution of potable water installations and general requirements of devices to prevent pollution by backflow as detailed in EN 1717 should be observed.
- Flexible inlet pipe should be installed in a self-draining position.