

MINI SQUARE

Thermostatic Flexi Shower Kit






Pack consists of:

*1 x 600021QD Thermostatic Shower valve
made up of:
1 x 35820QD Trim Set
1 x 3582113 Valve Rough*

*1 x 055SQ Square shower handset
1 x 048 Shower Hose
1 x 088SSQ Square Wall Outlet
1 x 3450184.A Slim Slider Bar*

Style 25 QUADRA

**Termostática embutida 2 furos
3/4" thermostatic valve**

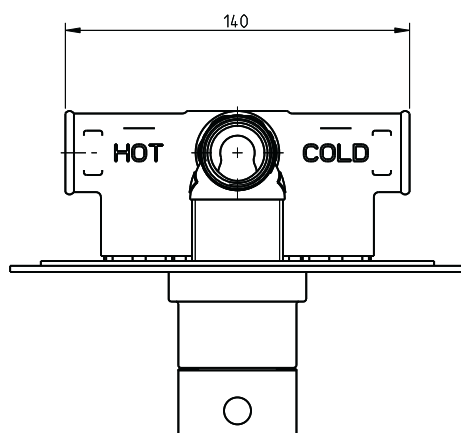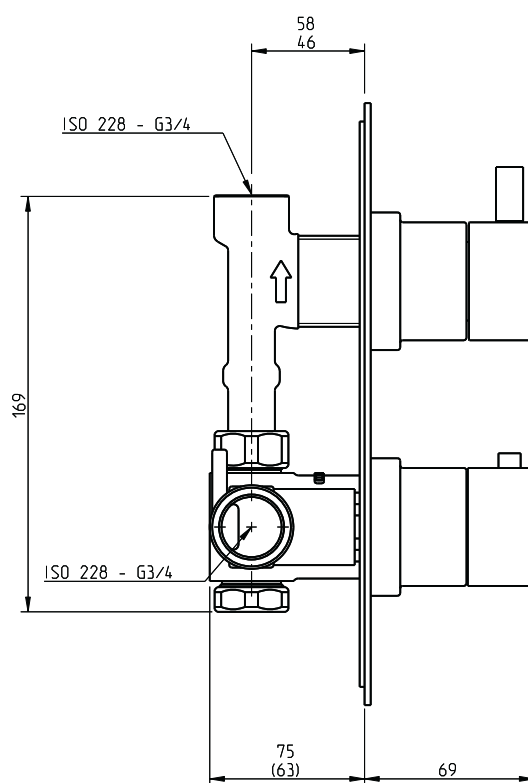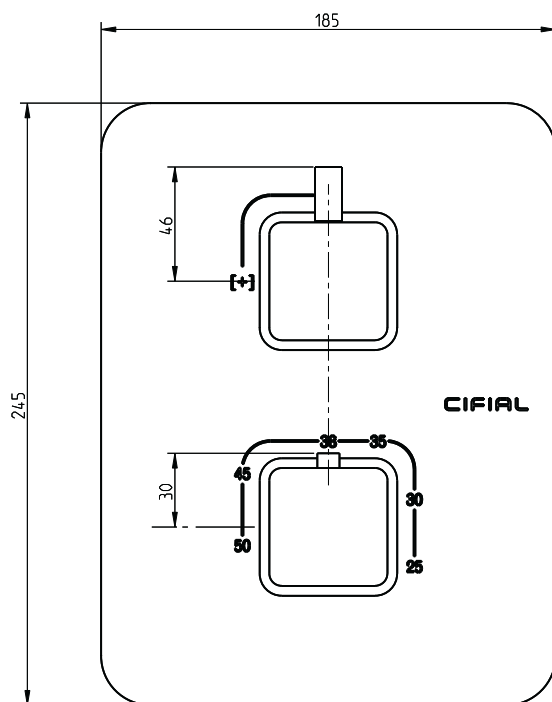


CIFIAL

www.cifial.pt | cifial@cifial.pt
cifial@cifial.es
www.cifial.co.uk | sales@cifial.co.uk
www.cifialusa.com
www.cifial.pl | cifial@cifial.pl

dimensões / dimensions mm

nota/note: xxx representa diferentes acabamentos
xxx represent different finishes

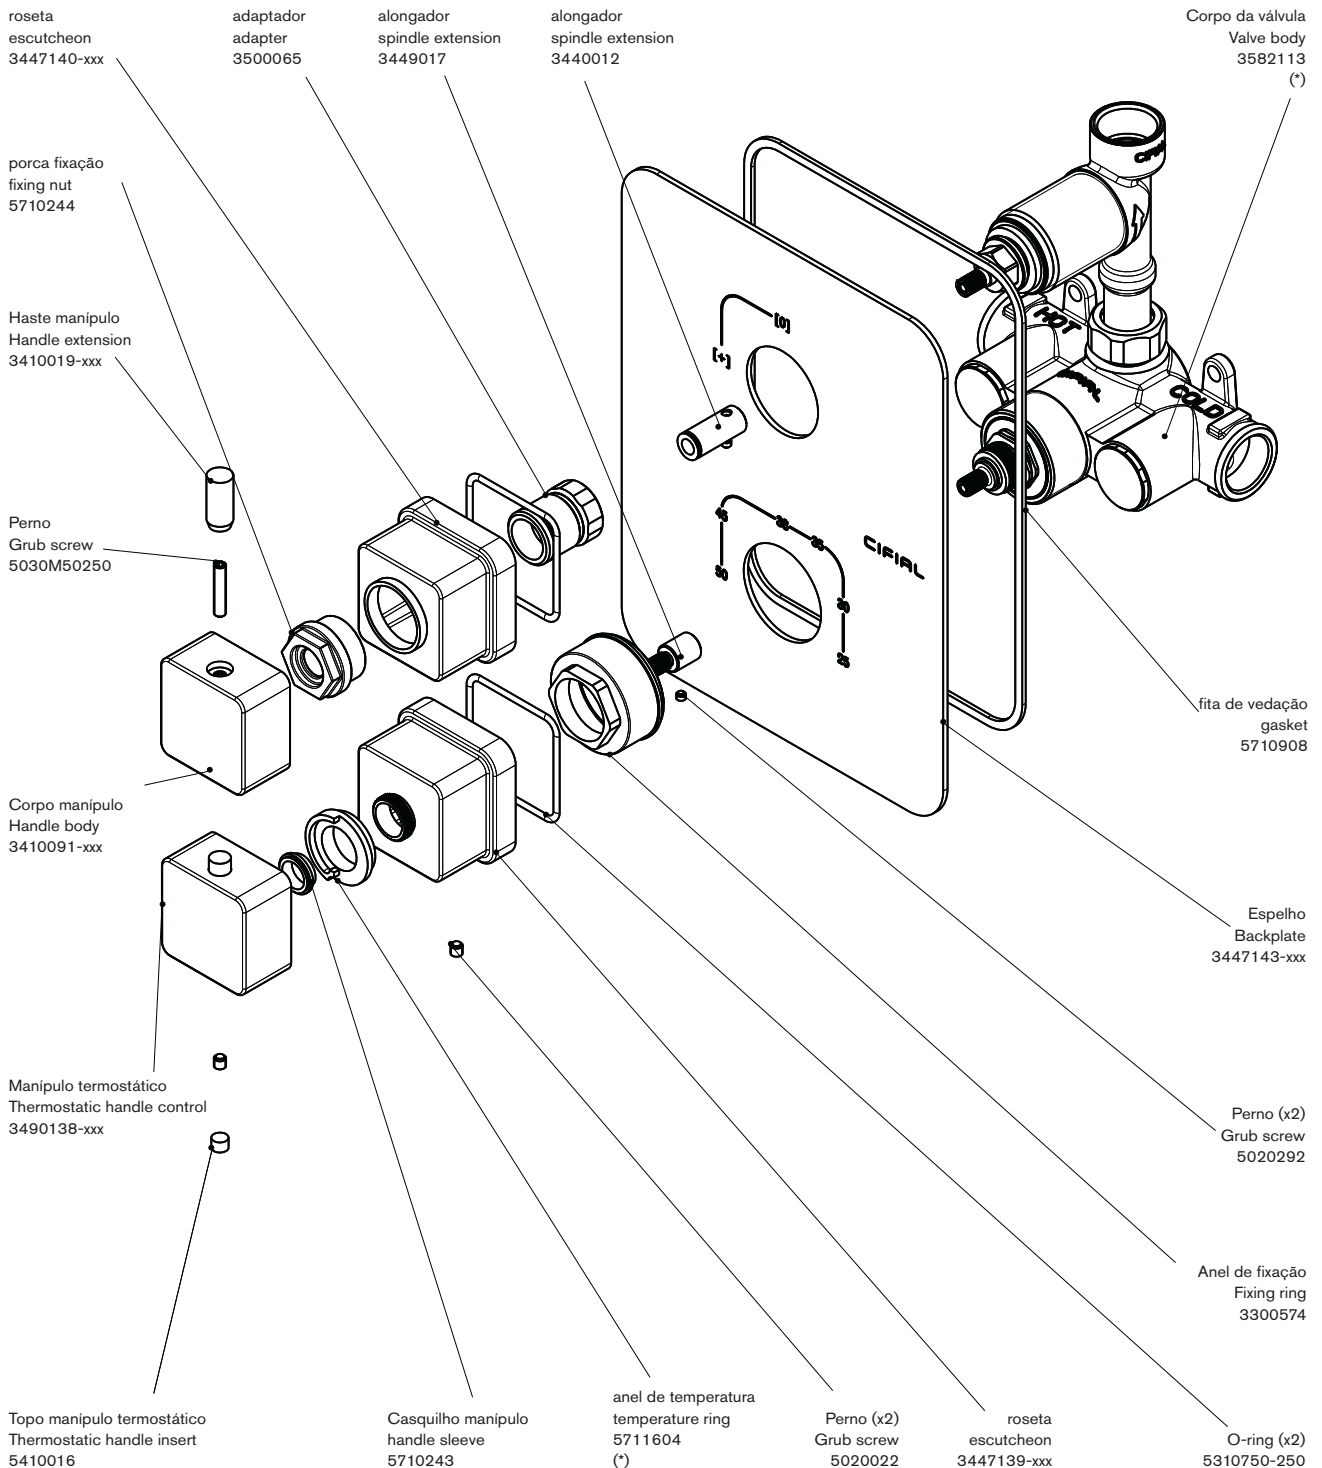


www.cifial.pt | cifial@cifial.pt
cifial@cifial.es
www.cifial.co.uk | sales@cifial.co.uk
www.cifialusa.com
www.cifial.pl | cifial@cifial.pl

Notas / Notes:

- 1) Na instalação, alinhar o ponto vermelho do anel limitador de temperatura com o número 38 impresso no espelho.
The red dot on the temperature limit ring must be aligned with the number 38 on the back plate.
- 2) (*) Não fornecida com o conjunto
(*) Not supplied with trim
- 3) xxx indica o código do acabamento.
xxx represent different finishes.

apertar/desapertar
tighten/untighten
haste manipul
handle extension



Instalador: Por favor entregue todas as instruções que acompanham este produto ao seu proprietário.

Installer: Please leave all leaflets with the building owner to file for future reference

PT

EN

operação



O manípulo superior abre, fecha e regula o caudal da água. O manípulo inferior controla a temperatura da água misturada.

A temperatura da água considerada confortável está entre os 32°C e 38°C, mas a possibilidade de regulação vai dos 26°C até aos 50°C.


O anel limitador de temperatura evita queimaduras acidentais não permitindo que o manípulo seja rodado para além dos 38°C. No caso de se pretender ultrapassar aquela temperatura, deve premir-se o botão e rodar o manípulo no sentido contrário dos ponteiros do relógio. Para prevenir queimaduras, deve assegurar-se que o manípulo seja recolocado numa posição anterior ao batente de segurança (= ou <38°C).

regulação da válvula termostática (só quando necessário)

2.
Marca vermelha orientada para os 38°C
Red mark aligned to the mark 38°C



4.
Botão limitador contra-queimaduras
Anti-scalding button



operation

The upper handle turns on and off the water and controls the flow rate.

The lower handle controls only the mixed water temperature.

The confort zone is in the range from 32°C to 38°C, but total range is 26°C to 50°C.

Protection against scalding stops the rotation of the handle at 38°C. If water above 38°C is desired, press on the button and turn the knob counterclockwise, to prevent scalding, ensure that the handle is left in a previous position (= or <38°C).

thermostatic valve regulation (only when needed)

1. Remove the thermostatic handle control.
2. Confirm if the temperature limit stop on the spindle presents its red mark coincident with the mark 38°C on the back plate; if not amend position.
3. Open the flow control valve, let the water run, and check by a thermometer the actual temperature delivered by the valve.


It is advisable that you choose a temperature of 38°C when resetting the calibration. To accomplish that, rotate the spindle counterclockwise to increase the temperature or vice-versa. To rotate the spindle, you can use the thermostatic handle control while depressing the button, if necessary.

4. Achieving the temperature of 38°C, apply the handle aligning the button with the mark 38°C.
5. Valve setting is now calibrated according to your own operating conditions.
6. Secure the thermostatic handle control with the grub screw.

note: It's recommended that you rotate the thermostatic control handle between the maximum and minimum limits, by pressing security button, and with the water running. This way you prevent limestone incrustation, that could block up the thermostatic cartridge.



SQUARE

flexi shower handset

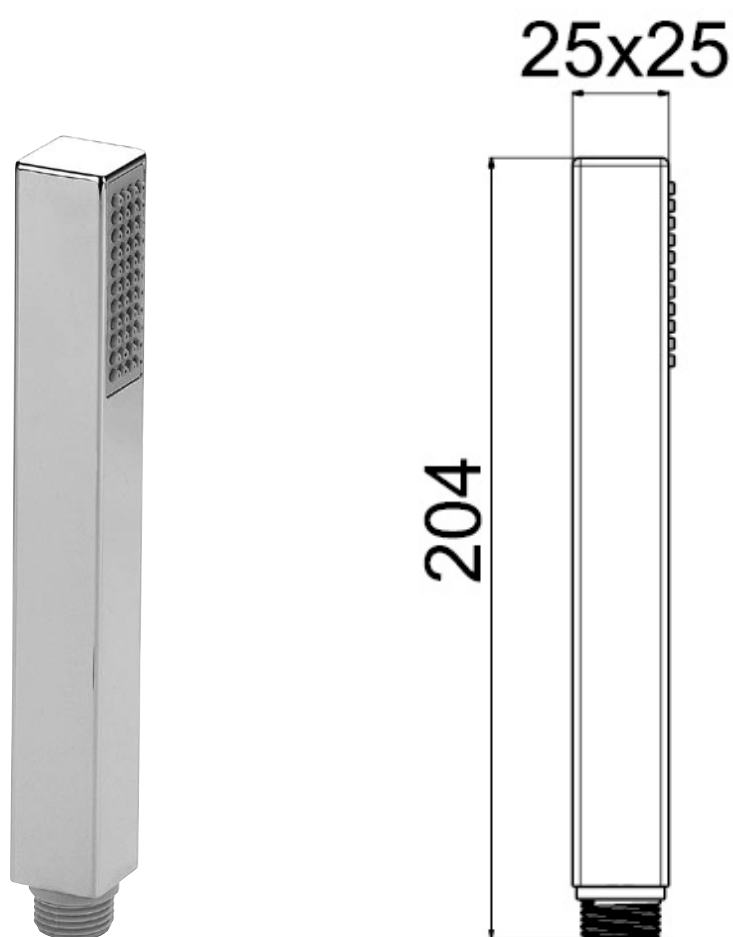

SQUARE

wall outlet

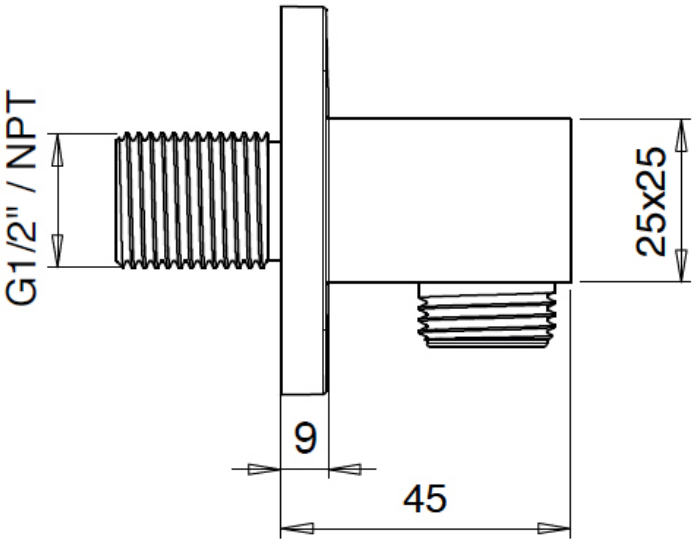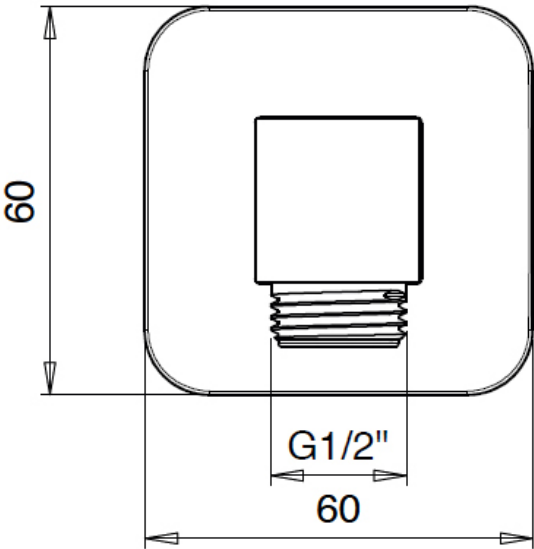

SLIM

820mm Shower Slider Bar

